查询AO4615供应商

ALPHA & OMEGA SEMICONDUCTOR

AO4615
Complementary Enhancement Mode Field Effect Transistor

General Description
The AO4615 uses advanced trench technology MOSFETs to provide excellent $R_{DS(ON)}$ and low gate charge. The complementary MOSFETs may be used to form a level shifted high side switch, and for a host of other applications. It is ESD protected. *Standard product AO4615 is Pb-free (meets ROHS & Sony 259 specifications). AO4615L is a Green Product ordering option. AO4615 and AO4615L are electrically identical*

Features
n-channel	p-channel
V_{DS} (V) = 30V	-30V
I_D = 7.2A (V_{GS}=10V)	-5.7A (V_{GS}=10V)
$R_{DS(ON)}$	$R_{DS(ON)}$
< 24mΩ (V_{GS}=10V)	< 39mΩ (V_{GS} = -10V)
< 40mΩ (V_{GS}=4.5V)	< 62mΩ (V_{GS} = -4.5V)

ESD rating: 1500V (HBM)
P-channel MOSFET has an additional R_{OC} < 1MΩ for open circuit protection.



SOIC-8



n-channel



p-channel

Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Max n-channel	Max p-channel	Units
Drain-Source Voltage		V_{DS}	30	-30	V
Gate-Source Voltage		V_{GS}	±20	±20	V
Continuous Drain Current [A]	T_A=25°C	I_D	7.2	-5.7	A
	T_A=70°C		6.1	-4.9	
Pulsed Drain Current [B]		I_{DM}	30	-30	
Power Dissipation	T_A=25°C	P_D	2	2	W
	T_A=70°C		1.44	1.44	
Avalanche Current [B]		I_{AR}	15	20	A
Repetitive avalanche energy 0.1mH [B]		E_{AR}	11	20	mJ
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	-55 to 150	°C

Thermal Characteristics: n-channel and p-channel

Parameter		Symbol	Typ	Max		Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	n-ch	55	62.5	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		n-ch	92	110	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	n-ch	37	50	°C/W
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	p-ch	48	62.5	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		p-ch	87	110	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	p-ch	37	50	°C/W

N-Channel Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V	30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=24V, V_{GS}=0V			1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±20V			10	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA	1	2	3	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	20			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=7.2A		20	24	mΩ
		T_J=125°C		29	35	
		V_{GS}=4.5V, I_D=4A		30	40	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=4A	10	18		S
V_{SD}	Diode Forward Voltage	I_S=1A		0.77	1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz		522	630	pF
C_{oss}	Output Capacitance			110		pF
C_{rss}	Reverse Transfer Capacitance			75		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		2.1	3	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=15V, I_D=7.2A		11	15	nC
Q_g(4.5V)	Total Gate Charge			5.3	7	nC
Q_{gs}	Gate Source Charge			1.9		nC
Q_{gd}	Gate Drain Charge			4		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=2.1Ω, R_{GEN}=3Ω		4.7	7	ns
t_r	Turn-On Rise Time			4.9	10	ns
$t_{D(off)}$	Turn-Off DelayTime			16.2	22	ns
t_f	Turn-Off Fall Time			3.5	7	ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=7.2A, dI/dt=100A/µs		15.7	20	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=7.2A, dI/dt=100A/µs		7.9	10	nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient. $R_{\theta JL}$ and $R_{\theta JC}$ are equivalent terms referring to thermal resistance from junction to drain lead.

D. The static characteristics in Figures 1 to 6 are obtained using 80µs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

F. Rev 0: July 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

N-CH TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

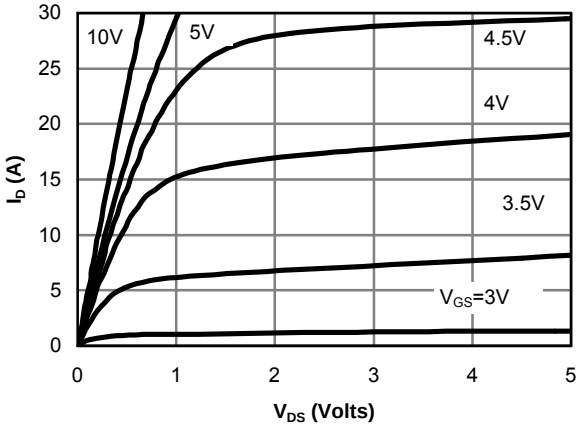

Fig 1: On-Region Characteristics

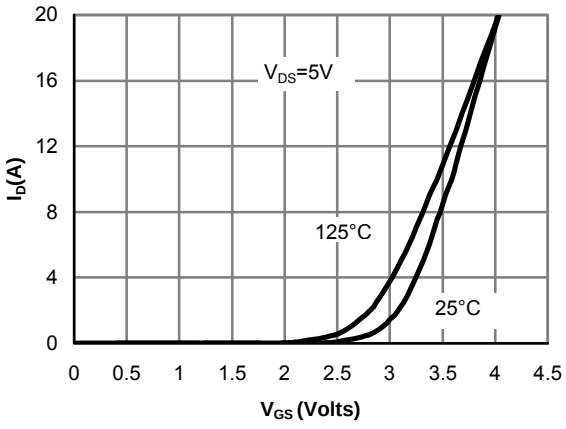

Figure 2: Transfer Characteristics

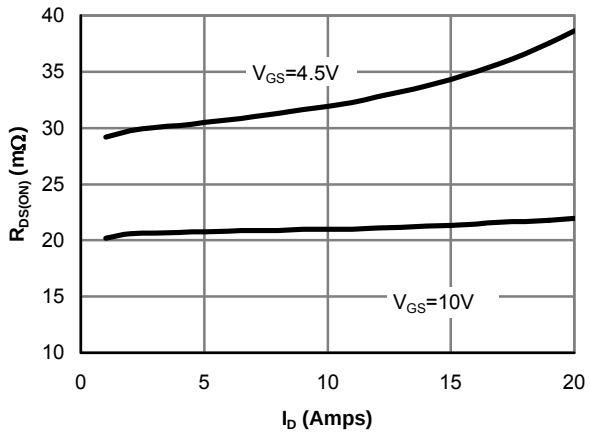

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

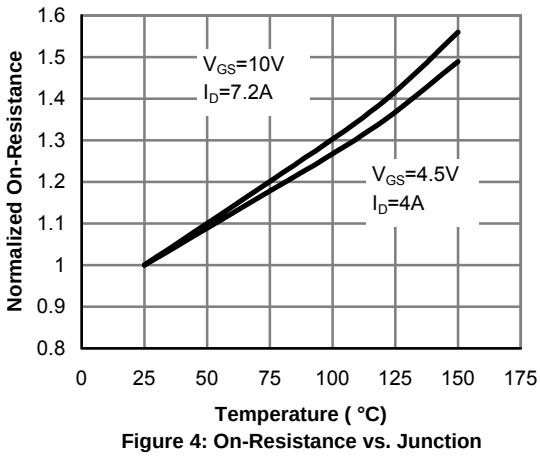

Figure 4: On-Resistance vs. Junction Temperature

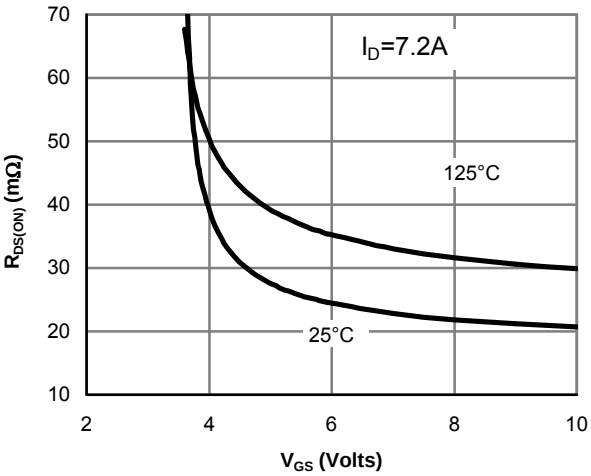

Figure 5: On-Resistance vs. Gate-Source Voltage

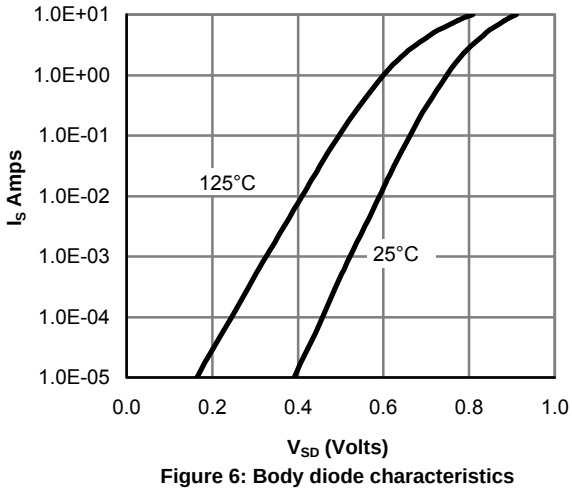

Figure 6: Body diode characteristics

N-CH TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

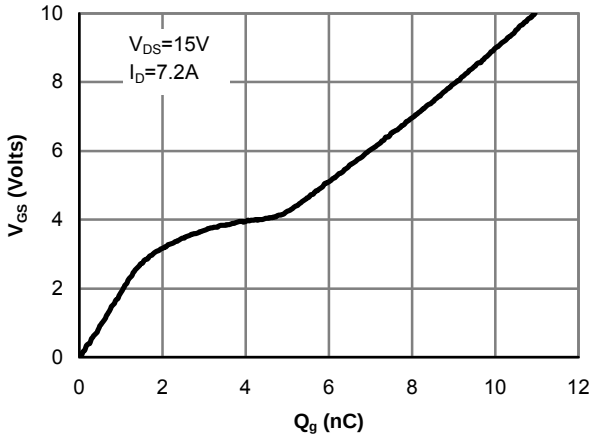

Figure 7: Gate-Charge characteristics

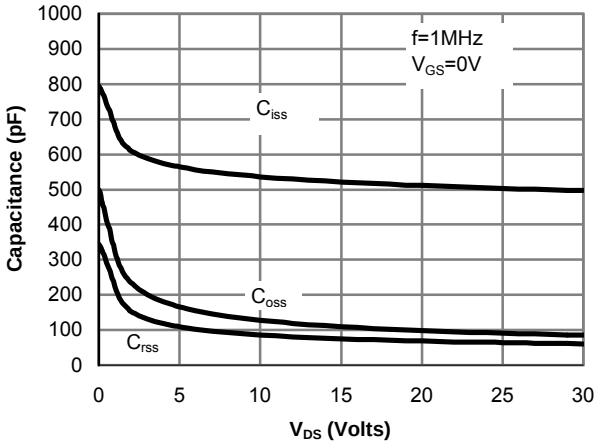

Figure 8: Capacitance Characteristics

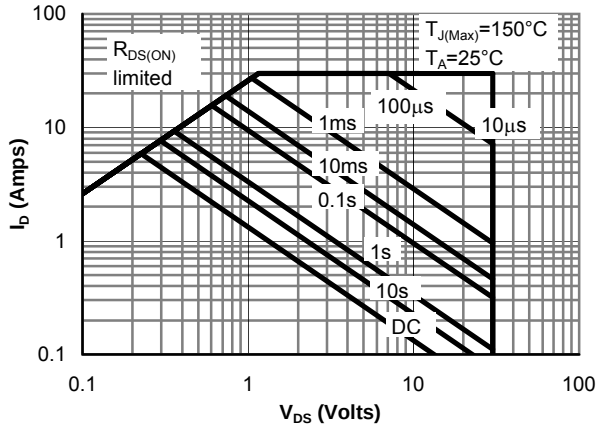

Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

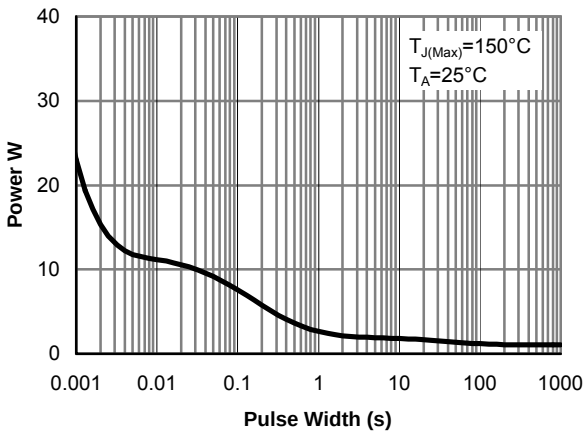

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

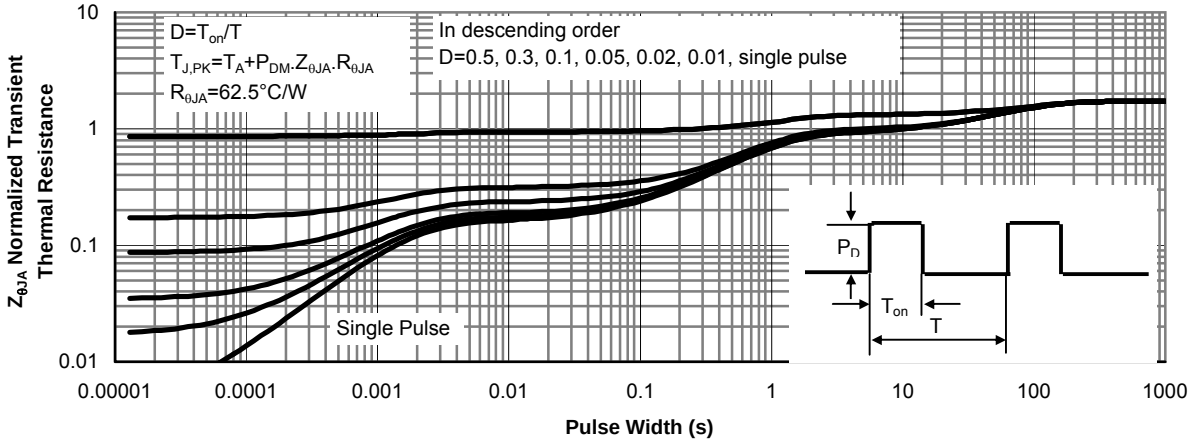

Figure 11: Normalized Maximum Transient Thermal Impedance

P-Channel Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=-250µA, V_{GS}=0V	-30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=-24V, V_{GS}=0V			-1	µA
		T_J=55°C			-5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}=±5V			15	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=-250µA	-1	-2	-3	V
$I_{D(ON)}$	On state drain current	V_{GS}=-10V, V_{DS}=-5V	30			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=-10V, I_D=-5.7A		32	39	mΩ
		T_J=125°C		46	56	
		V_{GS}=-4.5V, I_D=-4A		48	62	mΩ
g_{FS}	Forward Transconductance	V_{DS}=-5V, I_D=-5.7A		13		S
V_{SD}	Diode Forward Voltage	I_S=-1A,V_{GS}=0V		-0.77	-1	V
I_S	Maximum Body-Diode Continuous Current				3	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=-15V, f=1MHz		1035	1250	pF
C_{oss}	Output Capacitance			161		pF
C_{rss}	Reverse Transfer Capacitance			99		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		4.5	10	Ω
R_{oc}	Open-circuit protection resistance	V_{GS}=5V	0.5	0.7	1	MΩ
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge (10V)	V_{GS}=-10V, V_{DS}=-15V, I_D=-5.7A		18	24	nC
Q_g(4.5V)	Total Gate Charge (4.5V)			8.9	12	nC
Q_{gs}	Gate Source Charge			3.8		nC
Q_{gd}	Gate Drain Charge			4.1		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=-10V, V_{DS}=-15V, R_L=2.6Ω, R_{GEN}=3Ω		8	11	ns
t_r	Turn-On Rise Time			6	12	ns
$t_{D(off)}$	Turn-Off DelayTime			19.5	26	ns
t_f	Turn-Off Fall Time			5.9	12	ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=-5.7A, dI/dt=100A/µs		20.2	27	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=-5.7A, dI/dt=100A/µs		13.5	18	nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient. $R_{\theta JL}$ and $R_{\theta JC}$ are equivalent terms referring to thermal resistance from junction to drain lead.

D. The static characteristics in Figures 1 to 6,12,14 are obtained using 80µs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

F. Rev 0: July 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

P-CH TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

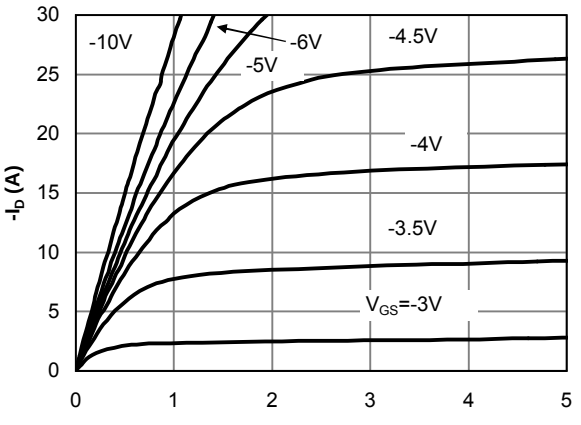

Fig 1: On-Region Characteristics

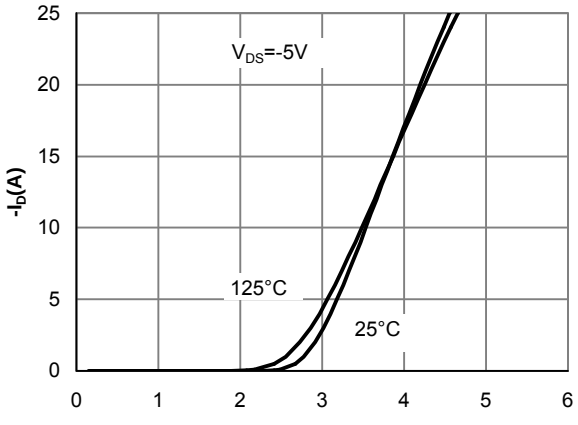

Figure 2: Transfer Characteristics

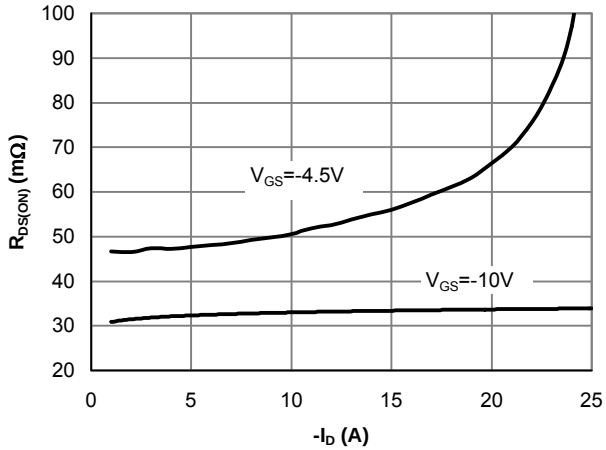

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

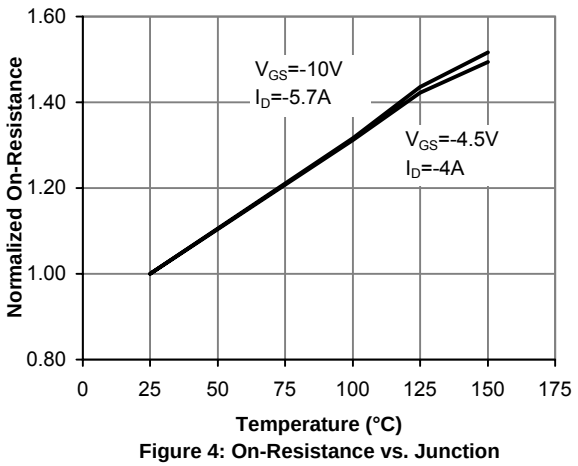

Figure 4: On-Resistance vs. Junction Temperature

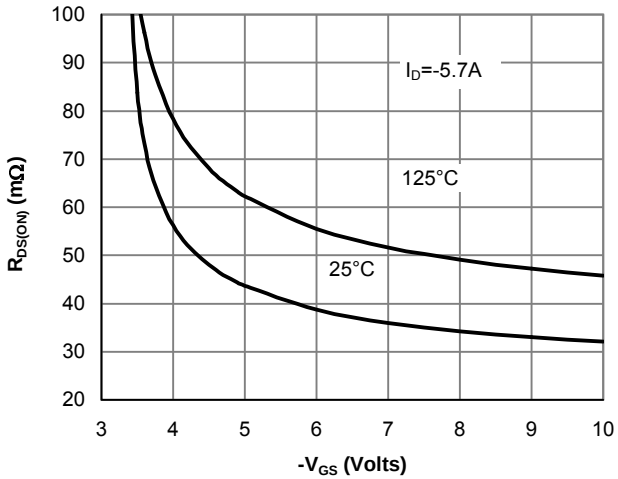

Figure 5: On-Resistance vs. Gate-Source Voltage

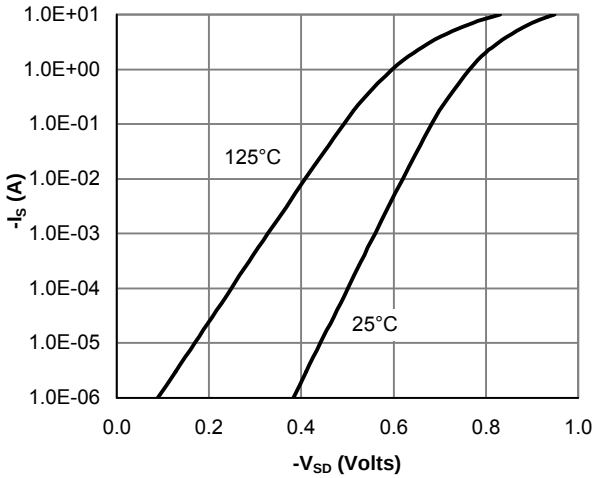

Figure 6: Body-Diode Characteristics

P-CH TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

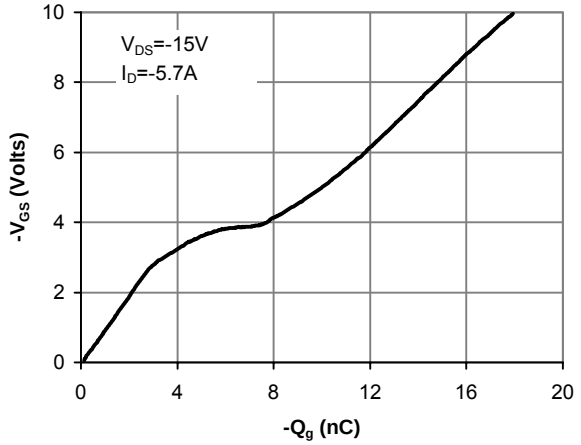

Figure 7: Gate-Charge Characteristics

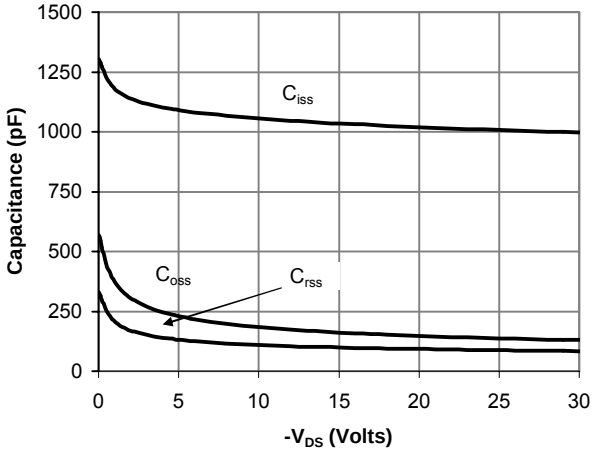

Figure 8: Capacitance Characteristics

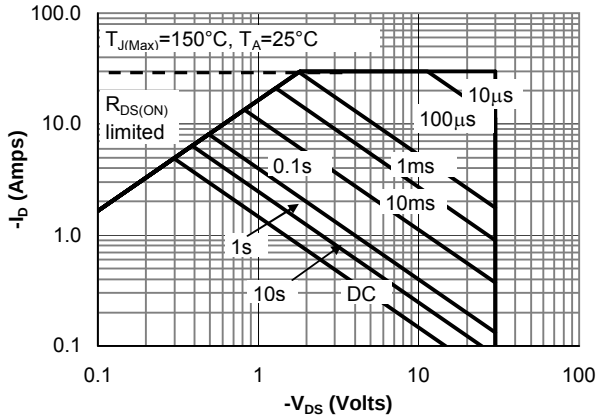

Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

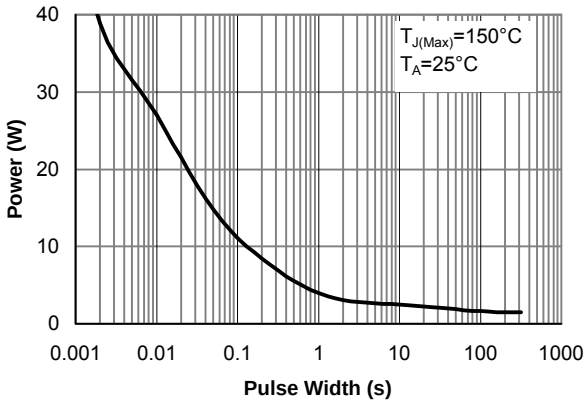

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

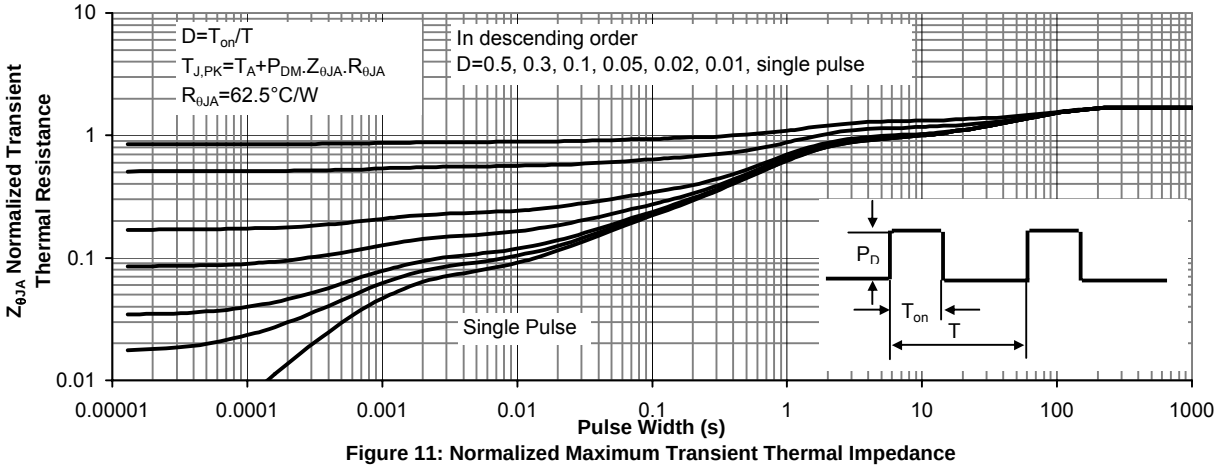

Figure 11: Normalized Maximum Transient Thermal Impedance

中发网 WWW.ZFA.CN
全球最大的PDF中文下载站

中发网
www.zfa.cn

PDF 资料下载尽在中发网

版权所有 中发飞询 京ICP证041662号 Copyright © 2004-2005 www.zfa.cn All Rights Reserved
客 服 热 线： 深圳 0755-83278916，83278919 北京 010-62632888，62636888